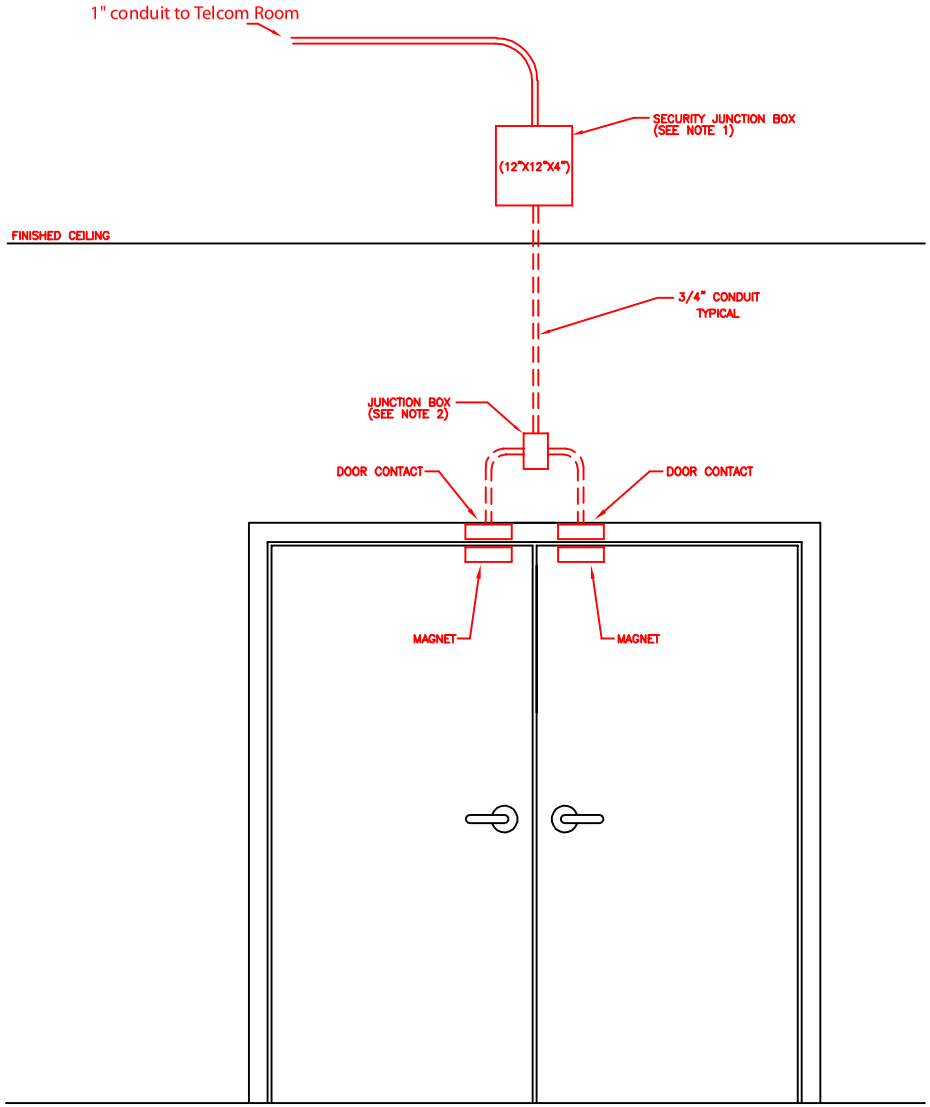

SECURE SIDE OF DOOR

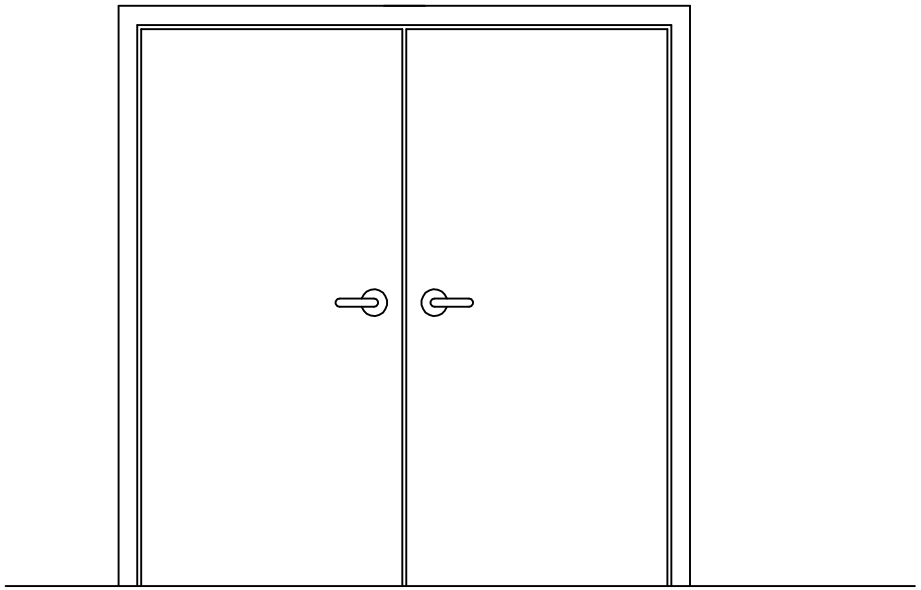

UN-SECURE SIDE OF DOOR

DOUBLE DOOR WITH SURFACE MOUNTED MAGNETIC CONTACT

NOTES:

1.) MOUNT SECURITY JUNCTION BOX ABOVE DOOR, OR ABOVE ACCESSIBLE CEILING, WHERE APPLICABLE ON SECURE SIDE AS SHOWN.
2.) PROVIDE SINGLE GANG ELECTRICAL BOX (W/ BLANK PLATE) FOR THE DOOR CONTACTS MOUNTED ABOVE DOOR ON THE SECURE SIDE AS SHOWN.
3.) ALL CONDUIT TO BE 3/4" UNLESS SPECIFIED OTHERWISE. ALL CONDUIT TO BE INSTALLED INSIDE OF WALL. FLEXIBLE CONDUIT MAY BE USED IF NECESSARY. ALL CONDUIT RUNS SHALL BE FURNISHED WITH A PULL STRING.
4.) DETAIL REPRESENTS TYPICAL CONDUIT REQUIREMENTS.

10/25/05